


CONTI⁺ lino lavatory faucet L20

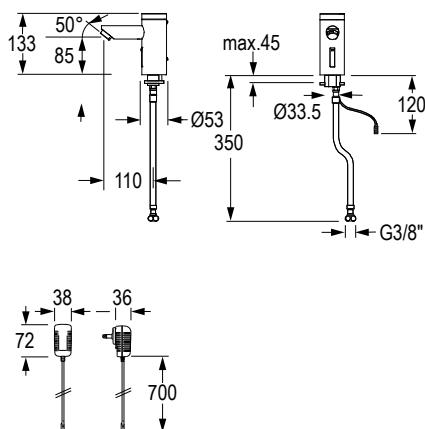

lino lavatory faucet L20, with IR sensor, without temperature-mixing (for cold or premixed water), chromed

Touchless, electronically controlled lavatory faucet:









- ⌘ Modular single-piece design without separate installation box, sturdy brass housing, chromed
- ⌘ Infrared sensors with automatic setting feature, microprocessor
- ⌘ Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- ⌘ Cold water supply connection with flexible hose, built-in filter
- ⌘ Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- ⌘ Continuous water flow time and hygienic flush time adjustable with function key
- ⌘ Follow-up time and sensor sensitivity adjustable with function key
- ⌘ 12, 24 or 48-hour hygienic flush activatable with function key
- ⌘ Installation similar to conventional single-lever faucet
- ⌘ Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Click: Recessed function key - without additional functions
Click-plus: Protruding function key Click-plus (continuous-on, temporary-off)
Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years
Solar: Photovoltaic cells with 6 V Lithium CRP2 (support batteries)
commercial - life-time up to 6 years
Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V
VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)


Operating pressure: 0,3-10 bar
Flow rate: Approx. 6 l/min / 1,6 gpm (3 bar)
Water temperature (max.): 80 °C
Aerator: Economic aerator, CASCADE (self-cleaning)
Flexible hose: 350 mm
Angle valve connection: G 3/8
Built-in filter: 0,5 mm mesh size
Sensor sensitivity: Automatic self-adapting sensor technology
Follow-up time: 1 s pre-set (adjustable with function key 0-10 s)
Continuous water flow and hygienic flush time: 2 min pre-set (adjustable with function key 0,5-20 min)
Temporary-off: 2 min (fixed)
Engineering standards: DIN EN 200; Noise class I; P-IX 9575 / IA; C€

Optional: Extension kit for countertop basins (see accessories)

Note: When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.
When using the Service APP, the BLE Converter must be ordered separately.

| Versions | |  Function key Click-plus |  Function key Click |
|---|----------------|---|--|
| Power supply | Drain assembly | Article number | Article number |
|  Battery | Without | 120.140.11 | 120.040.11 |
|  Mains operation  | Without | 120.150.11 | 120.050.11 |
|  VARIOconnect  | Without | 120.156.11 | 120.056.11 |
|  Solar | Without | 120.148.11 | 120.048.11 |

CONTI⁺ lino lavatory faucet L20

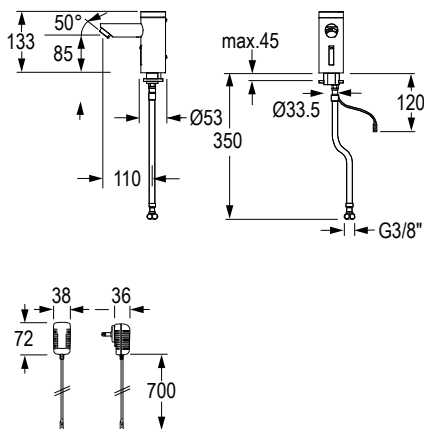

lino lavatory faucet L20, with IR sensor, without temperature-mixing (for cold or premixed water), PVD

Touchless, electronically controlled lavatory faucet:

- ⌘ Modular single-piece design without separate installation box, sturdy brass housing, PVD
- ⌘ Infrared sensors with automatic setting feature, microprocessor
- ⌘ Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- ⌘ Cold water supply connection with flexible hose, built-in filter
- ⌘ Continuous water flow time and hygienic flush time adjustable with function key
- ⌘ Follow-up time and sensor sensitivity adjustable with function key
- ⌘ 12, 24 or 48-hour hygienic flush activatable with function key
- ⌘ Installation similar to conventional single-lever faucet
- ⌘ Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Click: Recessed function key - without additional functions
 Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years
 Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V
 VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar
 Flow rate: Approx. 6 l/min / 1,6 gpm (3 bar)
 Water temperature (max.): 80 °C
 Aerator: Economic aerator, CASCADE (self-cleaning)
 Flexible hose: 350 mm
 Angle valve connection: G 3/8
 Built-in filter: 0,5 mm mesh size
 Sensor sensitivity: Automatic self-adapting sensor technology
 Follow-up time: 1 s pre-set (adjustable with function key 0-10 s)
 Continuous water flow and hygienic flush time: 2 min pre-set (adjustable with function key 0,5-20 min)
 Temporary-off: 2 min (fixed)
 Engineering standards: DIN EN 200; Noise class I; P-IX 9575 / IA; C €


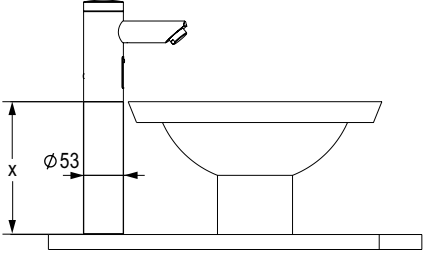
Note:

When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered separately.

| Version | | Function key Click | |
|-----------------|----------------|--------------------|-------------------|
| Stromversorgung | Drain assembly | Colour | Article number |
| Battery | Without | Brushed nickel | 120.040.01 |
| | | Polished brass | 120.040.22 |
| | | Brushed chrome | 120.040.44 |
| VARIOconnect | Without | Brushed nickel | 120.056.00 |
| | | Polished brass | 120.056.22 |
| | | Brushed chrome | 120.056.44 |

CONTI Accessories lino lavatory faucets

|  |  | <p>Faucet extension for lino lavatory faucets</p> <p>Extension suitable for L10, L13, L20, L10i</p> <ul style="list-style-type: none"> ⌘ One-piece design without concealed parts ⌘ Sturdy brass, chromed <p>Set consisting of:</p> <ul style="list-style-type: none"> ⌘ Extension ⌘ Threaded rod ⌘ Connection hoses and filters <p>Only for faucets without drain assembly!</p> | | |
|---|--|---|-------------------|--|
| Description | Length (x) | Colour | Article number | |
| Faucet extension lino | 177 mm | Chromed | 550.034.11 | |
| | 56 mm | Chromed | 550.034.12 | |