


CONTI⁺ lino lavatory faucet L30

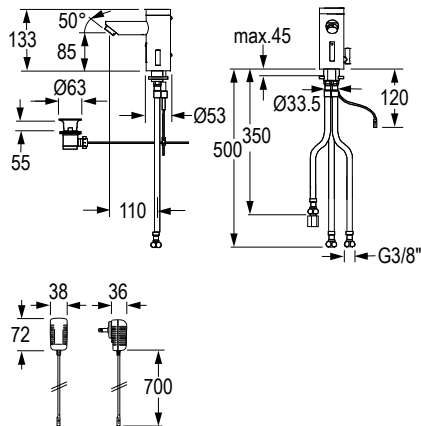

lino lavatory faucet L30, with IR sensor, with temperature-mixing, low pressure (for open water heater), chromed









Touchless, electronically controlled lavatory faucet:

- ⌘ Modular single-piece design without separate installation box, sturdy brass housing, chromed
- ⌘ Infrared sensors with automatic setting feature, microprocessor
- ⌘ Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- ⌘ Cold water supply connection for decentralized water treatment (boiler)
- ⌘ With flexible high-pressure hoses, flow limiters and built-in filters
- ⌘ Temperature adjustable or fixable (vandal-resistant construction)
- ⌘ Adjustable hot water limitation (mechanically)
- ⌘ Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- ⌘ Continuous water flow time and hygienic flush time adjustable with function key
- ⌘ Follow-up time and sensor sensitivity adjustable with function key
- ⌘ 12, 24 or 48-hour hygienic flush activatable with function key
- ⌘ Installation similar to conventional single-lever faucet
- ⌘ Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Click: Recessed function key - without additional functions
 Click-plus: Protruding function key Click-plus (continuous-on, temporary-off)
 Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years
 Solar: Photovoltaic cells with 6 V Lithium CRP2 (support batteries) commercial life-time up to 6 years
 Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V
 VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar
 Flow rate (approx.): 5 l/min / 1,3 gpm (3 bar)
 Water temperature (max.): 80 °C
 Aerator: Flow Straightener, FS Dripless
 Flexible hoses: 2x500 mm / 1x350 mm
 Angle valve connection: G 3/8
 Built-in filters: 0,5 mm mesh size
 Sensor sensitivity: Automatic self-adapting sensor technology
 Follow-up time: 1 s pre-set (adjustable with function key 0-10 s)
 Continuous water flow and hygienic flush time: 2 min pre-set (adjustable with function key 0,5-20 min)
 Temporary-off: 2 min (fixed)
 Engineering standards: DIN EN 200; Noise class I; P-IX 9575 / IA; CEE

Note: When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.
 When using the Service APP, the BLE Converter must be ordered separately.

Version		 Function key Click-plus	 Function key Click
Power supply	Drain assembly	Article number	Article number
 Battery	Without	120.120.11	120.020.11
	With	120.121.11	120.021.11
 Mains operation 	Without	120.130.11	120.030.11
	With	120.131.11	120.031.11
 VARIOconnect 	Without	120.136.11	120.036.11
	With	120.137.11	120.037.11
 Solar	Without	120.128.11	120.028.11
	With	120.129.11	120.029.11