


CONTI⁺ maxx lavatory faucet M20



maxx lavatory faucet M20, with IR sensor, without temperature-mixing (for cold or premixed water), chromed

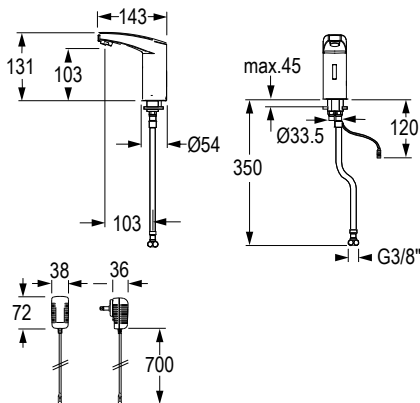




Touchless, electronically controlled lavatory faucet:

Modular single-piece design without separate installation box, sturdy metal housing, chromed
Integrated battery (maintenance via service cover)
Infrared sensors with automatic setting feature, microprocessor
Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
Cold water supply connection with flexible hose and built-in filter
Temporary-off (cleaning) and continuous water flow time (filling of basin) adjustable with Touch
Continuous-on and hygienic flush time adjustable with Touch
Follow-up time, sensor-sensitivity adjustable with Touch
12, 24 or 48-hour hygienic flush adjustable with Touch
Installation similar to conventional single-lever faucet
Compatible with CNX and Service APP: Control of stored operational data, settings and control functions

Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years
Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V
VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar;
Flow rate (approx.): 6 l/min / 1,6 gpm (3 bar)
Water temperature (max.): 80 °C
Aerator: Economic aerator, CASCADE (self-cleaning)
Flexible hose: 350 mm
Angle valve connection: G 3/8
Built-in filter: 0,5 mm mesh size
Sensor sensitivity: Automatic self-adapting sensor technology
Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)
Continuous water flow and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)
Temporary-off: 2 min (fixed);
Engineering standards: DIN EN 200; CEE

Note: When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.
When using the Service APP, the BLE Converter must be ordered separately.
Only possible with mains and VARIOconnect versions.

Power supply	Drain assembly	Colour	Article number
 Battery	Without	Chrome	131.040.11
 Mains operation 	Without	Chrome	131.050.11
 VARIOconnect 	Without	Chrome	131.056.11