


## CONTI ultra lavatory faucet GH10 EXPERT

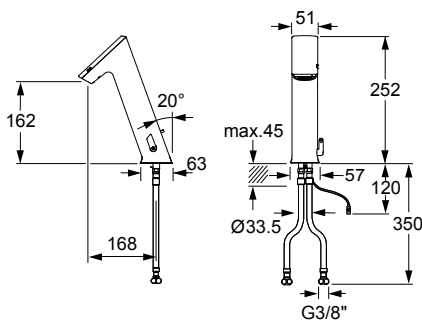

ultra lavatory faucet GH10 EXPERT, with IR sensor, with temperature-mixing, solar, chromed

Touchless, electronically controlled lavatory faucet:

- Continuous water flow via integrated piezo button
- Modular single-piece design without separate installation box, sturdy metal housing, chromed
- LCD display: shows the temperature and water flow time
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Vandal-resistant aerator (replaceable with integrated tool)
- Hot and cold water supply connection with flexible high-pressure hose
- Check valves and built-in filters
- Adjustable hot water limitation (mechanically)
- Scald protection adjustable (mechanical)
- TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter (no shut-off to angle valves required)
- One Tool Service / all system parts accessible from above
- 12 or 24-hour hygienic flush activatable with Touch
- Automatic energy saving function (solar) and safety shutdown
- Integrated battery unit
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

**Solar:** Photovoltaic cell in combination with 4x1,5 V Alkaline AA batteries (support batteries) commercial; life time up to 8 years

**Operating pressure:** 0,3-10 bar  
**Flow rate:** Approx. 6 l/min (3 bar)  
**Water temperature (max.):** 80 °C  
**Aerator:** Aerator RC  
**Flexible hoses:** 350 mm  
**Angle valve connection:** G 3/8  
**Built-in filters:** 0,5 mm mesh size  
**Sensor sensitivity:** Automatic self-adapting sensor technology  
**Follow-up time:** 1 s pre-set (adjustable with Touch 0-10 s)  
**Continuous water flow and hygienic flush time:** 2 min pre-set (adjustable with Touch 0,5-20 min)  
**Temporary-off:** 2 min (fixed)  
**Engineering standards:** DIN EN 200; CE

**Optional:** Valve unit with multi laminar spray head 2 l/min (see accessories)

**Note:** When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.  
 When using the Service APP, the BLE Converter must be ordered separately.

Power supply	Drain assembly	Colour	Article number
Solar	Without	Chrome	<b>163.108.11</b>