


CONTI ultra lavatory faucet GM20 PUBLIC



ultra lavatory faucet GM20 PUBLIC, with IR sensor, without temperature-mixing (for cold or premixed water), chromed

Touchless, electronically controlled lavatory faucet:

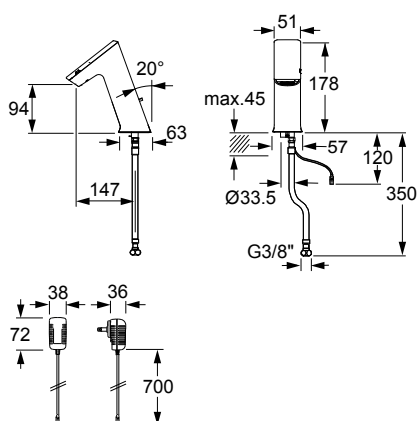









Modular single-piece design without separate installation box, sturdy metal housing, chromed
Dual infrared sensors (with automatic setting feature), microprocessor
Reliable solenoid valve ROBUST (minimal level of water pressure surge)
Vandal-resistant aerator (replaceable with integrated tool)
Cold water supply connection with flexible hose
Built-in filter
TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter (no shut-off to angle valves required)
One Tool Service / all system parts accessible from above
Automatic energy saving function (solar)
12 or 24-hour hygienic flush activatable with Touch
Integrated battery unit
Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Battery: 4x1,5 V Alkaline AA batteries; life time up to 4 years
Solar: Photovoltaic cell in combination with 4x1,5 V Alkaline AA batteries (support batteries) commercial; life time up to 8 years
Turbine: Integrated turbine in combination with 4x1,5 V Alkaline AA batteries (support batteries) commercial; life-time up to 8 years
Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V
VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)


Operating pressure: 0,3-10 bar
Flow rate: Approx. 6 l/min (3 bar)
Water temperature (max.): 80 °C
Aerator: Aerator RC
Flexible hose: 350 mm
Angle valve connection: G 3/8
Built-in filter: 0,5 mm mesh size
Sensor sensitivity: Automatic self-adapting sensor technology
Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)
Continuous water flow and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)
Temporary-off: 2 min (fixed)
Engineering standards: DIN EN 200; **CE**

Optional: Valve unit with multi laminar spray head 2 l/min (see accessories)

Note: When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.
When using the Service APP, the BLE Converter must be ordered separately.

Power supply	Drain assembly	Colour	Article number
 Battery 	Without	Chromed	162.040.11
 Mains operation 	Without	Chromed	162.050.11
 VARIOconnect 	Without	Chromed	162.056.11
 Solar 	Without	Chromed	162.048.11
 Turbine 	Without	Chromed	162.078.11

CONTI ultra lavatory faucet GM20 PUBLIC

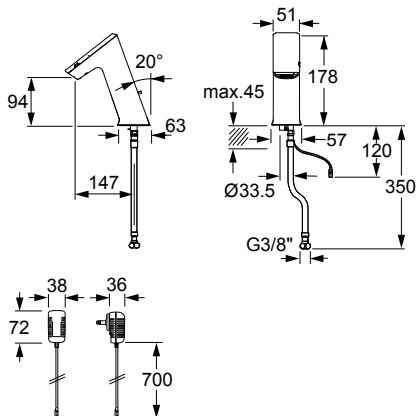

ultra lavatory faucet GM20 PUBLIC, with IR sensor, without temperature-mixing (for cold or premixed water), PVD

Touchless, electronically controlled lavatory faucet:

Modular single-piece design without separate installation box, sturdy metal housing, PVD

Dual infrared sensors (with automatic setting feature), microprocessor

Reliable solenoid valve ROBUST (minimal level of water pressure surge)

Vandal-resistant aerator (replaceable with integrated tool)

Cold water supply connection with flexible hose

Built-in filter

TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter (no shut-off to angle valves required)

One Tool Service / all system parts accessible from above

Automatic energy saving function (solar)

12 or 24-hour hygienic flush activatable with Touch

Integrated battery unit

Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Battery: 4x1,5 V Alkaline AA batteries; life time up to 4 years

Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate: Approx. 6 l/min (3 bar)

Water temperature (max.): 80 °C

Aerator: Aerator RC

Flexible hose: 350 mm

Angle valve connection: G 3/8

Built-in filter: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology

Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)

Continuous water flow and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min (fixed)

Engineering standards: DIN EN 200; CE

Optional: Valve unit with multi laminar spray head 2 l/min (see accessories)

Note: When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.
When using the Service APP, the BLE Converter must be ordered separately.

Power supply	Drain assembly	Colour	Article number
Battery	Without	Brushed nickel	162.040.00
		Polished brass	162.040.22
		Brushed chrome	162.040.44
VARIOconnect	Without	Brushed nickel	162.056.00
		Polished brass	162.056.22
		Brushed chrome	162.056.44