


CONTI ultra lavatory faucet GS10 PUBLIC



ultra lavatory faucet GS10 PUBLIC, with IR sensor, with temperature-mixing, chromed

Touchless, electronically controlled lavatory faucet:

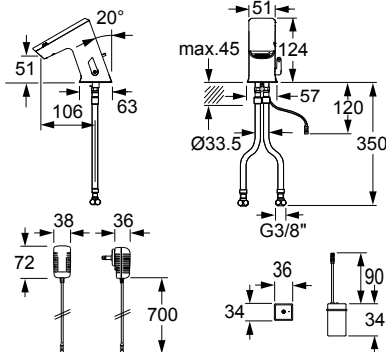





Modular single-piece design, without separate installation box, sturdy metal housing, chromed
Dual infrared sensors (with automatic setting feature), microprocessor
Reliable solenoid valve ROBUST (minimal level of water pressure surge)
Vandal-resistant aerator (replaceable with integrated tool)
Hot and cold water supply connection with flexible high-pressure hoses
Check valves and built-in filters
Temperature adjustable or fixable (vandal-resistant construction)
Adjustable hot water limitation (mechanically)
TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter (no shut-off to angle valves required)
One Tool Service / all system parts accessible from above
12 or 24-hour hygienic flush activatable with Touch
External battery box
Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Battery: 4x1,5 V Alkaline AA batteries; life time up to 4 years
Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V
VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar
Flow rate: Approx. 6 l/min (3 bar)
Water temperature (max.): 80 °C
Aerator: Aerator RC
Flexible hoses: 350 mm
Angle valve connection: G 3/8
Built-in filters: 0,5 mm mesh size
Sensor sensitivity: Automatic self-adapting sensor technology
Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)
Continuous water flow and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)
Temporary-off: 2 min (fixed)
Engineering standards: DIN EN 200; CEE

Optional: Valve unit with multi laminar spray head 2 l/min (see accessories)

Note: When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.
When using the Service APP, the BLE Converter must be ordered separately.

Power supply	Drain assembly	Colour	Article number
 Battery 	Without	Chromed	161.000.11
 Mains operation 	Without	Chromed	161.010.11
 VARIOconnect 	Without	Chromed	161.016.11