


## CONTI ultra concealed wall-mounted faucet GW20

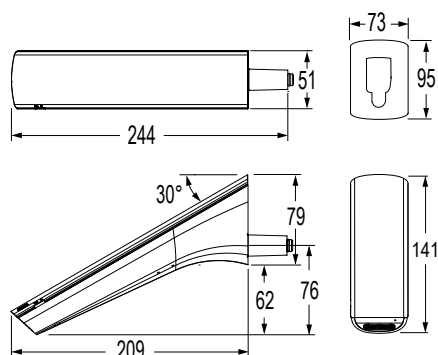

ultra concealed wall-mounted faucet GW20, with IR sensor, without temperature-mixing, chromed - final installation set

Touchless, electronically controlled lavatory faucet:

- For cold water or premixed water
- Sturdy metal housing
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Vandal-resistant aerator (replaceable with integrated tool)
- Built-in filter
- TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter
- Strainer cleaning (no shut-off required)
- One Tool Service - all system parts accessible from above
- 12 or 24-hour hygienic flush, activatable with Touch
- Integrated battery unit for VARIO connect version
- Battery version is prepared for conversion to mains supply
- Automatic energy saving function (solar) and safety shutdown
- Installation in combination with ultra shell set U3U (not included)
- Compatible with Service APP: Control of stored operational data, settings and control functions

Battery: 6 V Lithium CRP2; life time up to 4 years

VARIOconnect: For single and multiple power supply and data connection (Connection CNX or Service APP - see accessories)

Solar: Photovoltaic cell in combination with 4x1,5 V Alkaline AA batteries (backup batteries) life time up to 8 years

Operating pressure: 0,3-10 bar

Flow rate (approx.): 6 l/min (3 bar)

Water temperature (max.): 80 °C

Aerator: Aerator RC

Connection: G 1/2

Built-in filter: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology

Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)

Continuous water flow and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min (fixed)

Engineering standards: DIN EN 200; CEE


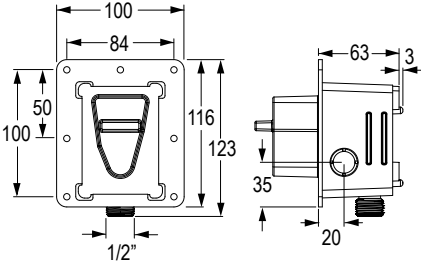
Required accessory: 220.060.00 ultra shell set U2U

Note: Service APP only available in conjunction with BLE Converter - no permanent evaluation option.

When using the Service APP, the BLE Converter must be ordered separately.

Stromversorgung	Drain assembly	Colour	Article number
Battery	Without	Chrome	<b>164.040.11</b>
Mains operation	Without	Chrome	<b>164.056.11</b>
Solar	Without	Chrome	<b>164.048.11</b>

# CONTI Accessories for ultra concealed wall-mounted faucet GW20

		<p>Shell set U3U, for concealed installation of wall-mounted lavatory faucets GW20</p> <ul style="list-style-type: none"> <li>• Concealed housing, stop valve and protective cover</li> <li>• Valve unit with integrated shut-off (TwistStop)</li> <li>• Flush connector</li> </ul>
Description	Type	Article number
ultra shell set U3U	Shell set with stop valve and flush connector	<b>220.060.00</b>