


CONTI lino lavatory faucet L30



lino lavatory faucet L30, with IR sensor, with temperature-mixing, low pressure (for open water heater), chromed





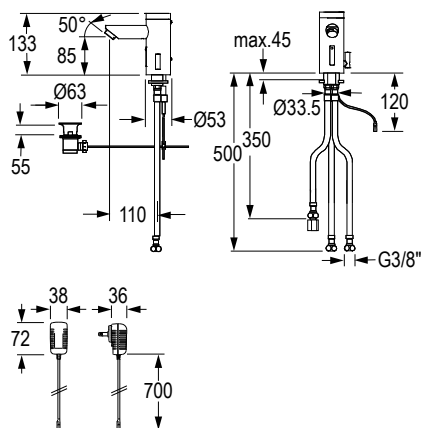



Touchless, electronically controlled lavatory faucet:

- ⌘ Modular single-piece design without separate installation box, sturdy brass housing, chromed
- ⌘ Infrared sensors with automatic setting feature, microprocessor
- ⌘ Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- ⌘ Cold water supply connection for decentralized water treatment (boiler)
- ⌘ With flexible high-pressure hoses, flow limiters and built-in filters
- ⌘ Temperature adjustable or fixable (vandal-resistant construction)
- ⌘ Adjustable hot water limitation (mechanically)
- ⌘ Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- ⌘ Continuous water flow time and hygienic flush time adjustable with function key
- ⌘ Follow-up time and sensor sensitivity adjustable with function key
- ⌘ 12, 24 or 48-hour hygienic flush activatable with function key
- ⌘ Installation similar to conventional single-lever faucet
- ⌘ Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Click: Recessed function key - without additional functions
Click-plus: Protruding function key Click-plus (continuous-on, temporary-off)
Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years
Solar: Photovoltaic cells with 6 V Lithium CRP2 (support batteries) commercial life-time up to 6 years
Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V
VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar
Flow rate (approx.): 5 l/min / 1,3 gpm (3 bar)
Water temperature (max.): 80 °C
Aerator: Flow Straightener, FS Dripless
Flexible hoses: 2x500 mm / 1x350 mm
Angle valve connection: G 3/8
Built-in filters: 0,5 mm mesh size
Sensor sensitivity: Automatic self-adapting sensor technology
Follow-up time: 1 s pre-set (adjustable with function key 0-10 s)
Continuous water flow and hygienic flush time: 2 min pre-set (adjustable with function key 0,5-20 min)
Temporary-off: 2 min (fixed)
Engineering standards: DIN EN 200; Noise class I; P-IX 9575 / IA; CEE

Note: When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.
When using the Service APP, the BLE Converter must be ordered separately.

| Version | |  Function key Click-plus |  Function key Click |
|---|----------------|---|--|
| Power supply | Drain assembly | Article number | Article number |
|  Battery | Without | 120.120.11 | 120.020.11 |
| | With | 120.121.11 | 120.021.11 |
|  Mains operation  | Without | 120.130.11 | 120.030.11 |
| | With | 120.131.11 | 120.031.11 |
|  VARIOconnect  | Without | 120.136.11 | 120.036.11 |
| | With | 120.137.11 | 120.037.11 |
|  Solar | Without | 120.128.11 | 120.028.11 |
| | With | 120.129.11 | 120.029.11 |