

CONTI  maxx lavatory faucet M10



maxx lavatory faucet M10, with IR sensor, with temperature-mixing, chromed

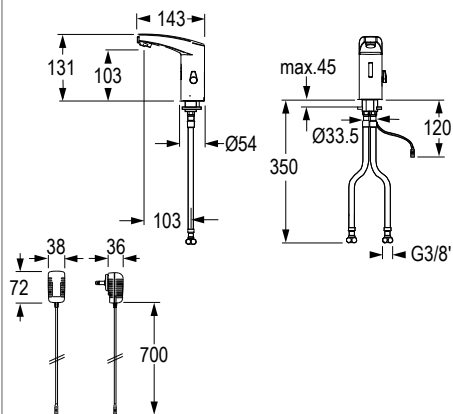
Touchless, electronically controlled lavatory faucet:






- Modular single-piece design without separate installation box, sturdy metal housing, chromed
- Integrated battery (maintenance via service cover)
- Infrared sensors with automatic setting feature, microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Hot and cold water supply connection with flexible high-pressure hoses
- Check valves and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- Temporary-off (cleaning) and continuous water flow time (filling of basin) adjustable with Touch
- Continuous-on and hygienic flush time adjustable with Touch
- Follow-up time, sensor-sensitivity adjustable with Touch
- 12, 24 or 48-hour hygienic flush adjustable with Touch
- Installation similar to conventional single-lever faucet
- Compatible with CNX and Service APP: Control of stored operational data, settings and control functions

Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years
 Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V
 VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar
 Flow rate (approx.): 6 l/ min 1,6 gpm (3 bar)
 Water temperature (max.): 80 °C
 Aerator: Economic aerator, CASCADE (self-cleaning)
 Flexible hoses: 350 mm
 Angle valve connection: G 3/8
 Built-in filters: 0,5 mm mesh size
 Sensor sensitivity: Automatic self-adapting sensor technology
 Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)
 Continuous water flow and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)
 Temporary-off: 2 min (fixed)
 Engineering standards: DIN EN 200; CE

Note: When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.
 When using the Service APP, the BLE Converter must be ordered separately.
 Only possible with mains and VARIOconnect versions.



Power supply	Drain assembly	Colour	Article number
 Battery	Without	Chrome	131.000.11
 Mains operation 	Without	Chrome	131.010.11
 VARIOconnect 	Without	Chrome	131.016.11