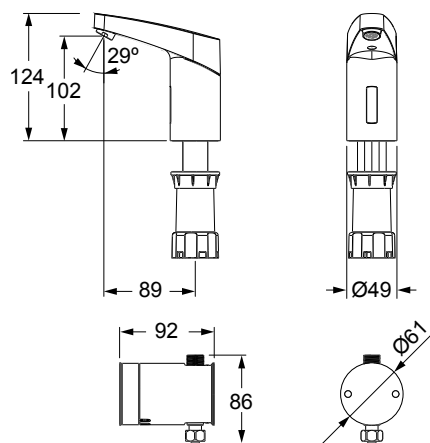


CONTI+ umaxx lavatory faucet M21



umaxx lavatory faucet M21, with IR sensor, without temperature-mixing (for cold or premixed water), chromed







Touchless, electronically controlled lavatory faucet:

- Sturdy metal housing, chromed
- Infrared sensors with automatic setting feature, microprocessor
- Small external hydraulic unit for direct mounting on the angle-stop valve or wall-mounted (optional) with reliable solenoid valve ROBUST (minimal level of water pressure surge) integrated waterproof battery box(in battery operated models only)
- Built-in filter
- Integrated water-resistant battery box, or cable connection for power supply
- Temporary-off (cleaning) and continuous water flow time (filling of basin) adjustable with Touch
- Continuous-on and hygienic flush time with Touch
- Follow-up time, sensor-sensitivity with Touch
- 12, 24 or 48-hour hygienic flush with Touch
- Compatible with Service APP and Service Monitor: control of stored operational data, settings and control functions


Battery: 6 V Lithium CRP2 - commercial, life time up to 4 years
Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V
VARIOconnect: For single and multiple power supply and data connection (Connection Service APP and Service Monitor - see accessories)

Operating pressure: 0,3-10 bar
Flow rate (approx.): 3,5 l/min / 0,9 gpm (3 bar)
Water temperature (max.): 80 °C
Aerator: Aerator HONEYCOMB
Flexible hose: 550 mm
Angle valve connection: G 3/8
Built-in filter: 0,5 mm mesh size
Sensor sensitivity: Automatic self-adapting sensor technology
Follow-up time: 1 s pre-set (adjustable with Touch)
Continuous water flow and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)
Temporary-off: 2 min (fixed)
Engineering standards: DIN EN 200; CE

Note: When using the Service APP, the BLE Converter must be ordered separately.

Power supply	Drain assembly	Colour	Article number
 Battery 	Without	Chrome	133.040.11
 Mains operation 	Without	Chrome	133.050.11
 VARIOconnect 	Without	Chrome	133.056.11

CONTI Accessories for umaxx lavatory faucet

	<p>Wall mounting kit for external valve unit</p> <p>Set consisting of:</p> <ul style="list-style-type: none"> 1 Wall bracket HU20 2 Screws 1 Armoured hose G 3/8 1 Twin connector cyl. OD 3/8 <p>Suitable for umaxx, ran</p>		
Description	Type	Article number	
umaxx wall mounting kit for external valve unit	Suitable for umaxx, ran	550.071.00	