


CONTI  ultra lavatory faucet GS20 PUBLIC




ultra lavatory faucet GS20 PUBLIC, with IR sensor, without temperature-mixing, (for cold or premixed water), chromed

Touchless, electronically controlled lavatory faucet:

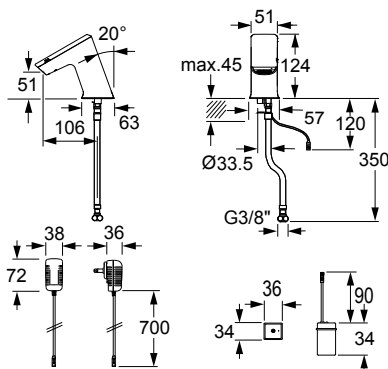





- Modular single-piece design, without separate installation box, sturdy metal housing, chromed
- Dual infrared sensor with automatic setting feature, microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Vandal-resistant aerator (replaceable with integrated tool)
- Cold water supply connection with flexible high-pressure hose
- Built-in filter
- TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter (no shut-off to angle valves required)
- One Tool Service / all system parts accessible from above
- 12 or 24-hour hygienic flush activatable with Touch
- External battery box
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Battery: 4x1,5 V Alkaline AA batteries; life time up to 4 years  
 Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V  
 VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar  
 Flow rate: Approx. 6 l/min (3 bar)  
 Water temperature (max.): 80 °C  
 Aerator: Aerator RC  
 Flexible hose: 350 mm  
 Angle valve connection: G 3/8  
 Built-in filter: 0,5 mm mesh size  
 Sensor sensitivity: Automatic self-adapting sensor technology  
 Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)  
 Continuous water flow and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)  
 Temporary-off: 2 min (fixed)  
 Engineering standards: DIN EN 200; 

**Optional:** Valve unit with multi laminar spray head 2 l/min (see accessories)

**Note:** When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.  
 When using the Service APP, the BLE Converter must be ordered separately.

Power supply	Drain assembly	Colour	Article number
 Battery 	Without	Chromed	<b>161.040.11</b>
 Mains operation 	Without	Chromed	<b>161.050.11</b>
 VARIOconnect 	Without	Chromed	<b>161.056.11</b>