


CONTI  ultra concealed wall-mounted faucet GW20

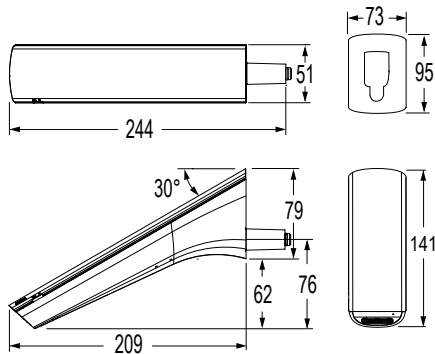

ultra concealed wall-mounted faucet GW20, with IR sensor, without temperature-mixing, chromed - final installation set

Touchless, electronically controlled lavatory faucet:

- For cold water or premixed water
- Sturdy metal housing
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Vandal-resistant aerator (replaceable with integrated tool)
- Built-in filter
- TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter
- Strainer cleaning (no shut-off required)
- One Tool Service - all system parts accessible from above
- 12 or 24-hour hygienic flush, activatable with Touch
- Integrated battery unit for VARIO connect version
- Battery version is prepared for conversion to mains supply
- Automatic energy saving function (solar) and safety shutdown
- Installation in combination with ultra shell set U3U (not included)
- Compatible with Service APP: Control of stored operational data, settings and control functions




Battery: 6 V Lithium CRP2; life time up to 4 years
 VARIOconnect: For single and multiple power supply and data connection (Connection CNX or Service APP - see accessories)
 Solar: Photovoltaic cell in combination with 4x1,5 V Alkaline AA batteries (backup batteries) life time up to 8 years

Operating pressure: 0,3-10 bar
 Flow rate (approx.): 6 l/min (3 bar)
 Water temperature (max.): 80 °C
 Aerator: Aerator RC
 Connection: G 1/2
 Built-in filter: 0,5 mm mesh size
 Sensor sensitivity: Automatic self-adapting sensor technology
 Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)
 Continuous water flow and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)
 Temporary-off: 2 min (fixed)
 Engineering standards: DIN EN 200; CE


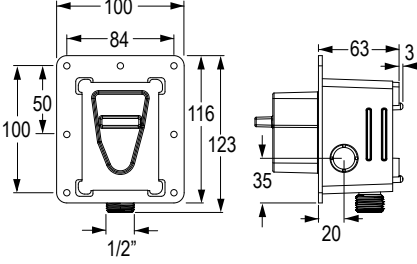
Required accessory: 220.060.00 ultra shell set U2U

Note: Service APP only available in conjunction with BLE Converter - no permanent evaluation option.

When using the Service APP, the BLE Converter must be ordered separately.

Stromversorgung	Drain assembly	Colour	Article number
 Battery	Without	Chrome	164.040.11
 Mains operation	Without	Chrome	164.056.11
 Solar	Without	Chrome	164.048.11

CONTI  Accessories for ultra concealed wall-mounted faucet GW20

		<p>Shell set U3U, for concealed installation of wall-mounted lavatory faucets GW20</p> <ul style="list-style-type: none"> • Concealed housing, stop valve and protective cover • Valve unit with integrated shut-off (TwistStop) • Flush connector
Description	Type	Article number
ultra shell set U3U	Shell set with stop valve and flush connector	220.060.00