


CONTI⁺ lino AS lavatory faucet L13 with thermostatic anti-scalding

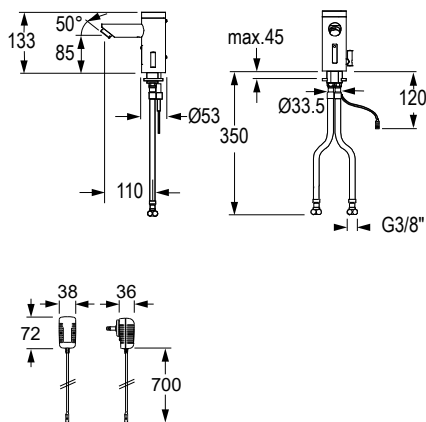

lino AS lavatory faucet L13 with thermostatic anti-scalding

Touchless, electronically controlled lavatory faucet, IR sensors, chromed

- ⌘ With automatic setting feature
- ⌘ Thermostatic temperature adjusting
- ⌘ Thermostatic anti-scalding function following standard EN 1111
- ⌘ Hot and cold water supply connection with flexible high-pressure hoses, check valves and built-in filters.
Note: water supply hot/cold must be installed crosswise
- ⌘ Reliable solenoid valve ROBUST
- ⌘ Economic aerator CASCADE self-cleaning
- ⌘ With function key Click for adjusting temporary-off (cleaning) and continuous water flow time (filling basin) sensor sensitivity, continuous water flow time and hygienic flush time, follow-up time, and 12-, 24- or 48-hour hygienic flush
- ⌘ Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Technical data:





Battery: 6 V Lithium CRP2, life time up to 4 years
Mains surface-mounted: plug-in power supply unit

Operating pressure: 0,3-10 bar
Flow rate (approx.): 6 l/min / 1,6 gpm (3 bar)
Water temperature (max.): 80 °C
Flexible hoses: 350 mm
Angle valve connection: G 3/8
Built-in filters: 0,5 mm mesh size
Follow-up time: 1 s pre-set adjustable with function key 0-10 s
Continuous water flow and hygienic flush time: 2 min pre-set adjustable with function key Click 0,5-20 min
Temporary-off: 2 min fixed
Standards: DIN EN 200; Noise class I, P-IX 9575 / IA, C€


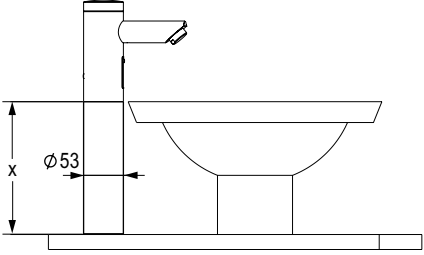
Note:

When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered separately.

Version		Function key Click 	
Stromversorgung	Drain assembly	Colour	Article number
 Battery	Without	Chrome	CONE8150208100
 Mains 	Without	Chrome	CONE8150208200

CONTI Accessories lino lavatory faucets

		<p>Faucet extension for lino lavatory faucets</p> <p>Extension suitable for L10, L13, L20, L10i</p> <ul style="list-style-type: none"> ⌘ One-piece design without concealed parts ⌘ Sturdy brass, chromed <p>Set consisting of:</p> <ul style="list-style-type: none"> ⌘ Extension ⌘ Threaded rod ⌘ Connection hoses and filters <p>Only for faucets without drain assembly!</p>		
Description	Length (x)	Colour	Article number	
Faucet extension lino	177 mm	Chromed	550.034.11	
	56 mm	Chromed	550.034.12	